


KOO Series Adjustable Long Throw Multi-Jet Nozzle Diffuser

Material | Aluminum jet nozzles and galvanized steel panel

Air Pattern | Long throw, independently adjustable directional jets



KOO
by MADEL®

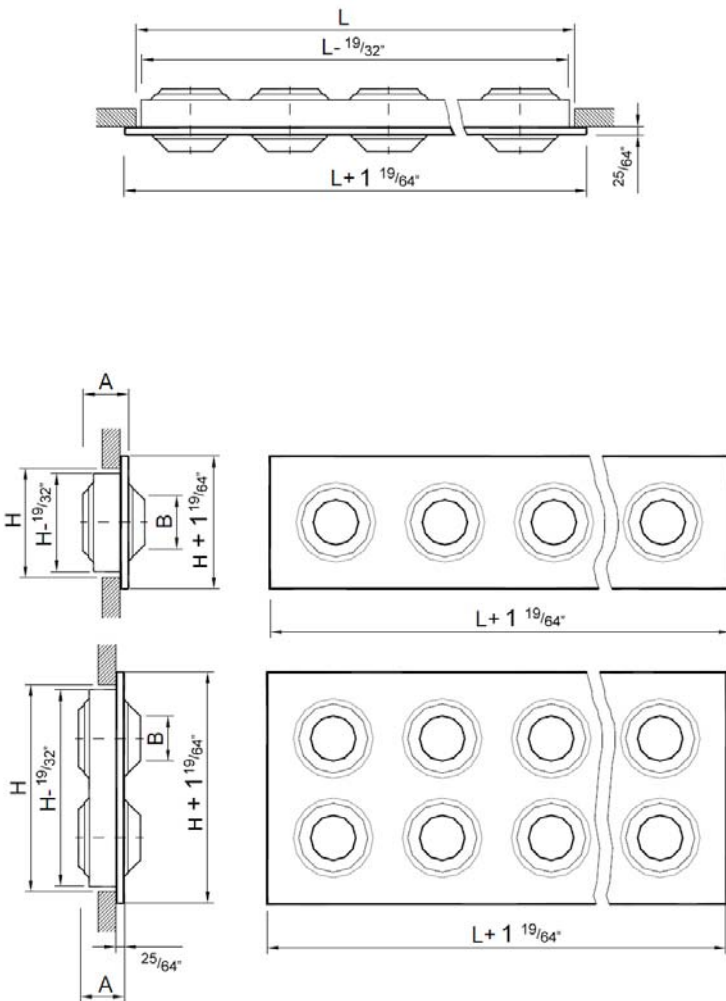


Select Dimension						
✓	List Size	Nb Nozzles	L	H	A	B
	8 x 4	2 x 1	7 7/8"	3 15/16"	1 3/8"	1 47/64"
	12 x 4	3 x 1	11 13/16"	3 15/16"	1 3/8"	1 47/64"
	16 x 4	4 x 1	15 3/4"	3 15/16"	1 3/8"	1 47/64"
	20 x 4	5 x 1	19 11/16"	3 15/16"	1 3/8"	1 47/64"
	24 x 4	6 x 1	23 5/8"	3 15/16"	1 3/8"	1 47/64"
	28 x 4	7 x 1	27 9/16"	3 15/16"	1 3/8"	1 47/64"
	32 x 4	8 x 1	31 1/2"	3 15/16"	1 3/8"	1 47/64"
	36 x 4	9 x 1	35 7/16"	3 15/16"	1 3/8"	1 47/64"
	40 x 4	10 x 1	39 3/8"	3 15/16"	1 3/8"	1 47/64"
	8 x 8	2 x 2	7 7/8"	7 7/8"	1 3/8"	1 47/64"
	12 x 8	3 x 2	11 13/16"	7 7/8"	1 3/8"	1 47/64"
	16 x 8	4 x 2	15 3/4"	7 7/8"	1 3/8"	1 47/64"
	20 x 8	5 x 2	19 11/16"	7 7/8"	1 3/8"	1 47/64"
	24 x 8	6 x 2	23 5/8"	7 7/8"	1 3/8"	1 47/64"
	28 x 8	7 x 2	27 9/16"	7 7/8"	1 3/8"	1 47/64"
	32 x 8	8 x 2	31 1/2"	7 7/8"	1 3/8"	1 47/64"
	36 x 8	9 x 2	35 7/16"	7 7/8"	1 3/8"	1 47/64"
	40 x 8	10 x 2	39 3/8"	7 7/8"	1 3/8"	1 47/64"
	12 x 6	2 x 1	11 13/16"	5 29/32"	2 1/4"	2 13/32"
	18 x 6	3 x 1	17 23/32"	5 29/32"	2 1/4"	2 13/32"
	24 x 6	4 x 1	23 5/8"	5 29/32"	2 1/4"	2 13/32"
	30 x 6	5 x 1	29 17/32"	5 29/32"	2 1/4"	2 13/32"
	36 x 6	6 x 1	35 7/16"	5 29/32"	2 1/4"	2 13/32"
	42 x 6	7 x 1	41 11/32"	5 29/32"	2 1/4"	2 13/32"
	48 x 6	8 x 1	47 1/4"	5 29/32"	2 1/4"	2 13/32"
	12 x 12	2 x 2	11 13/16"	11 13/16"	2 1/4"	2 13/32"
	18 x 12	3 x 2	17 23/32"	11 13/16"	2 1/4"	2 13/32"
	24 x 12	4 x 2	23 5/8"	11 13/16"	2 1/4"	2 13/32"
	30 x 12	5 x 2	29 17/32"	11 13/16"	2 1/4"	2 13/32"
	36 x 12	6 x 2	35 7/16"	11 13/16"	2 1/4"	2 13/32"
	42 x 12	7 x 2	41 11/32"	11 13/16"	2 1/4"	2 13/32"
	48 x 12	8 x 2	47 1/4"	11 13/16"	2 1/4"	2 13/32"

Balancing Position


POSITION 1 (0°)

KOO Lx4
KOO Lx6




POSITION 2 (22°)

KOO Lx4
KOO Lx6




POSITION 3 (45°)

KOO Lx4
KOO Lx6




POSITION 1 (0°)

KOO Lx8
KOO Lx12




POSITION 2 (22°)

KOO Lx8
KOO Lx12




POSITION 3 (45°)

KOO Lx8
KOO Lx12







Spring Clips Mounting




Invisible fixing by means of pressure clips with security hooks for ceiling installation. Requires PLRX plenum or CM mounting frame.

PLRX Plenum

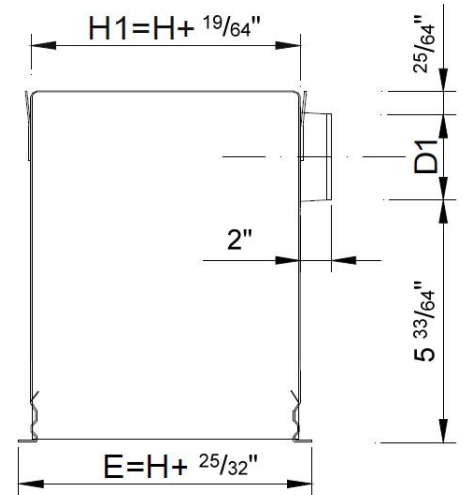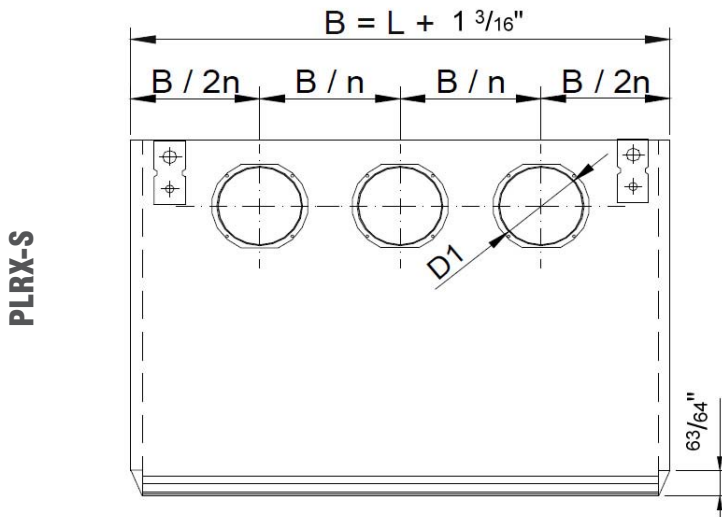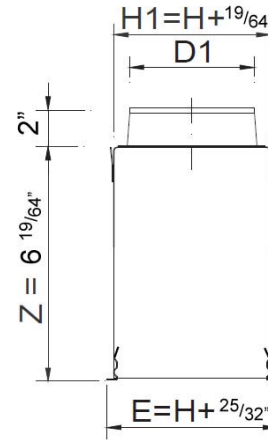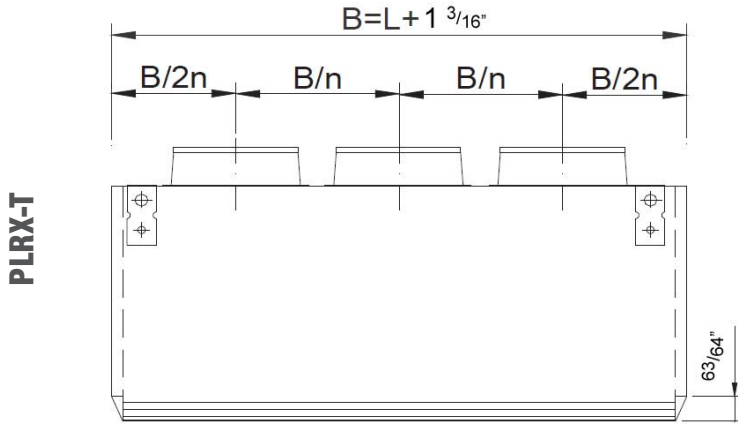


Neck Diameter and Quantity (n x D)						
L	< 24"	< 36"	< 40"	< 48"	>= 48"	
H	4"	1x 4"D	2x 4"D	2x 4"D	2x 4"D	3x 4"D
	6"	1x 5"D	2x 5"D	2x 5"D	2x 5"D	3x 5"D
	8"	1x 8"D	1x 8"D	2x 8"D	2x 8"D	2x 8"D
	12"	1x 10"D	1x 10"D	1x 10"D	2x 10"D	2x 10"D

Integrated Air Volume Dampers




R

Perforated damper +
air equalizer



MRT

Manually operated damper,
cable inside the plenum,
adjustment through face




MRT2

Manually operated damper,
cable through drywall with
termination fixture



EB

Battery operated
electro-balance damper
with remote control,
cable through face

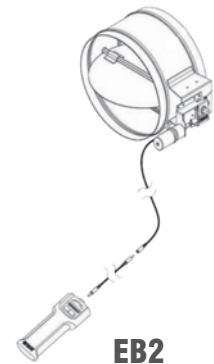

EB2

Battery operated
electro-balance damper
with remote control,
cable through drywall
with termination fixture

Important Note: MRT, MRT2, EB and EB2 Damper Options are only available for KOO with 2 rows (Height 8" and 12").

Accessories


EB-SP1

Single Connector
Drywall Termination
Fixture for EB
dampers



EB-AB8

Eight Connector
Wall Bracket for EB
dampers



EB-SP8

Eight Connector
Drywall Termination
Fixture for EB
dampers



EB-REMOTE

Remote Control for
EB dampers



Balancing Position (optional)	
1	Straight - 0 Degrees (Default)
2	22 Degrees Spread
3	45 Degrees Spread

Mounting	
S	Invisible fixing by means of pressure clips
T	Visible Screws

Finish	
M9016	Powder Coated White RAL 9016
M9006	Powder Coated Metallic Grey RAL 9006
RAL xxxx	Please Specify:

Plenum	
PLRX-T	Top (Back) connection
PLRX-S	Side connection

Insulation	
AL	1/2" Interior Accoustical Liner
R6	2" Exterior R6 Thermal Insulation

Neck-Installed Air Volume Damper	
R	Perforated air volume damper/equalizer
MRT	Manually operated, cable thru face
MRT2	Manually operated, termination fixture
EB	Electro-balanced, battery powered, cable thru face
EB2	Electro-balanced, battery powered, cable thru drywall

Cable Length (MRT2 or EB2)	

Project:	
Engineer:	
Architect:	
Contractor:	