


PERFAIR-SS Series High Performance Plenum for Square Diffusers Trapezoidal, Side Connection

Material | heavy gauge galvanized steel


Matching Faces | AXO-S, AXO-S300, AXO-S400, AXO-SX, AXO-SY, NEX-S, OTO-S, PLAY-S, RXO-S

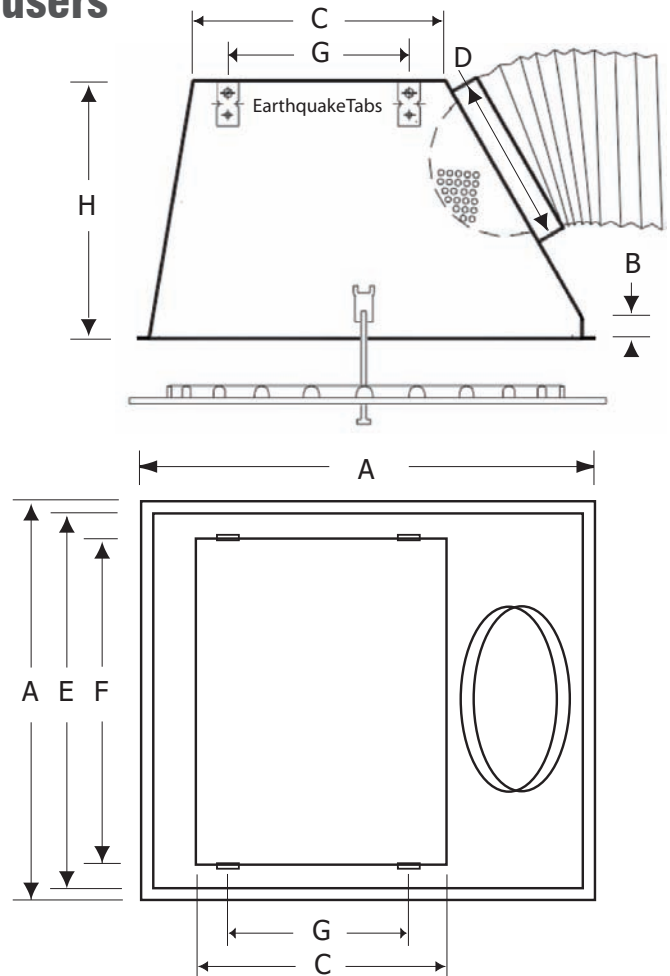

Select Model										
✓	Model	Duct Size	A	B	C	D	E	F	G	H
	PERFAIR-SS 1205	5	11 1/2	1	5 3/4	4 7/8	11 3/4	10 1/2	6 5/8	9 27/32
	PERFAIR-SS 1206	6	11 1/2	1	5 3/4	5 7/8	11 3/4	10 1/2	6 5/8	9 27/32
	PERFAIR-SS 1208	8	11 1/2	1	5 3/4	7 7/8	11 3/4	10 1/2	6 5/8	12
	PERFAIR-SS 1608	8	15 3/8	1	7 1/2	7 7/8	14 5/8	13 5/8	8 5/8	12
	PERFAIR-SS 2010	10	19 1/4	1	8 1/2	9 7/8	18 5/8	17 5/8	8 5/8	12
	PERFAIR-SS 2405	5	23 1/2	1	10 1/2	4 7/8	22 5/8	21 5/8	8 5/8	13 25/32
	PERFAIR-SS 2406	6	23 1/2	1	10 1/2	5 7/8	22 5/8	21 5/8	8 5/8	13 25/32
	PERFAIR-SS 2408	8	23 1/2	1	10 1/2	7 7/8	22 5/8	21 5/8	8 5/8	13 25/32
	PERFAIR-SS 2410	10	23 1/2	1	10 1/2	9 7/8	22 5/8	21 5/8	8 5/8	13 25/32
	PERFAIR-SS 2412	12	23 1/2	1	10 1/2	11 7/8	22 5/8	21 5/8	8 5/8	13 25/32


All dimensions in inches

Integrated Air Volume Dampers




R

Perforated damper +
air equalizer



MRT

Manually operated damper,
cable inside the plenum,
adjustment through face




MRT2

Manually operated damper,
cable through drywall with
termination fixture



EB

Battery operated
electro-balance damper
with remote control,
cable through face

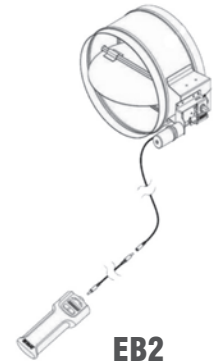

EB2

Battery operated
electro-balance damper
with remote control,
cable through drywall
with termination fixture

Insulation

AL	1/2" Interior Accoustical Liner
AL1	1" Interior Accoustical Liner
R6	2" Exterior R6 Thermal Insulation

Neck-Installed Air Volume Damper

R	Perforated air volume damper/equalizer
MRT	Manually operated, cable thru face
MRT2	Manually operated, termination fixture
EB	Electro-balanced, battery powered, cable thru face
EB2	Electro-balanced, battery powered, termination fixture

Cable Length (MRT2 or EB2)

--	--

Project:
Engineer:
Architect:
Contractor: