


PLRR Series High Performance Plenum, Round to Round Connection

Material | heavy gauge galvanized steel

Matching Products | AXP, DCG

| Select Model | | | | | |
|--------------|------------------|------|-------|--------|----|
| ✓ | Model | Duct | D1 | D2 | H |
| | PLRR 0504 | 4 | 3 7/8 | 5 | 6 |
| | PLRR 0505 | 5 | 4 7/8 | 5 | 6 |
| | PLRR 0605 | 5 | 4 7/8 | 6 3/8 | 6 |
| | PLRR 0606 | 6 | 5 7/8 | 6 3/8 | 6 |
| | PLRR 0805 | 5 | 4 7/8 | 8 | 8 |
| | PLRR 0806 | 6 | 5 7/8 | 8 | 8 |
| | PLRR 0808 | 8 | 7 7/8 | 8 | 8 |
| | PLRR 1006 | 6 | 5 7/8 | 10 | 8 |
| | PLRR 1008 | 8 | 7 7/8 | 10 | 8 |
| | PLRR 1010 | 10 | 9 7/8 | 10 | 8 |
| | PLRR 1208 | 8 | 7 7/8 | 12 3/8 | 10 |
| | PLRR 1210 | 10 | 9 7/8 | 12 3/8 | 10 |
| | PLRR 1212 | 10 | 9 7/8 | 12 3/8 | 10 |

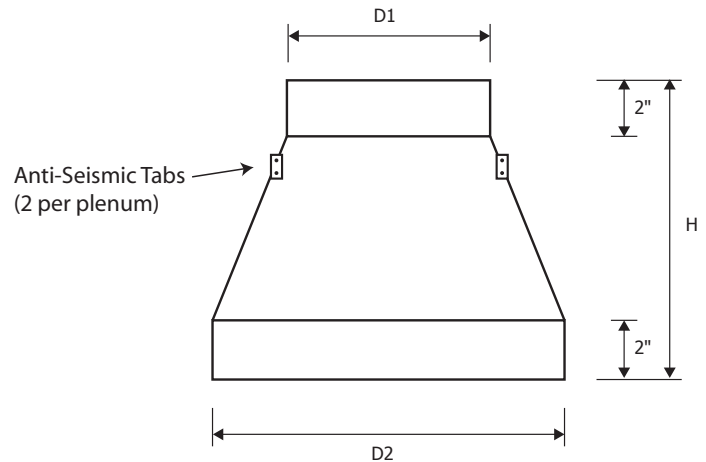

All dimensions in inches (in)

| Options | |
|-------------|---|
| EQ | Air Equalizing Grid (Perforated Plate) |
| R | Perforated air volume damper/equalizer |
| MRT | Manually operated cable damper, cable thru face |
| MRT2 | Manually operated cable damper, drywall fixture |
| EB | Electro-balanced cable damper, thru face |
| EB2 | Electro-balanced cable damper, drywall fixture |
| R6 | 2" Exterior R6 Thermal Insulation |

| Cable Length (MRT2 or EB2) | |
|----------------------------|--|
| | |

| Select Finish | |
|---------------|-------------|
| | Mill Finish |
| | Other RAL: |

| | |
|--------------------|--|
| Project: | |
| Engineer: | |
| Architect: | |
| Contractor: | |