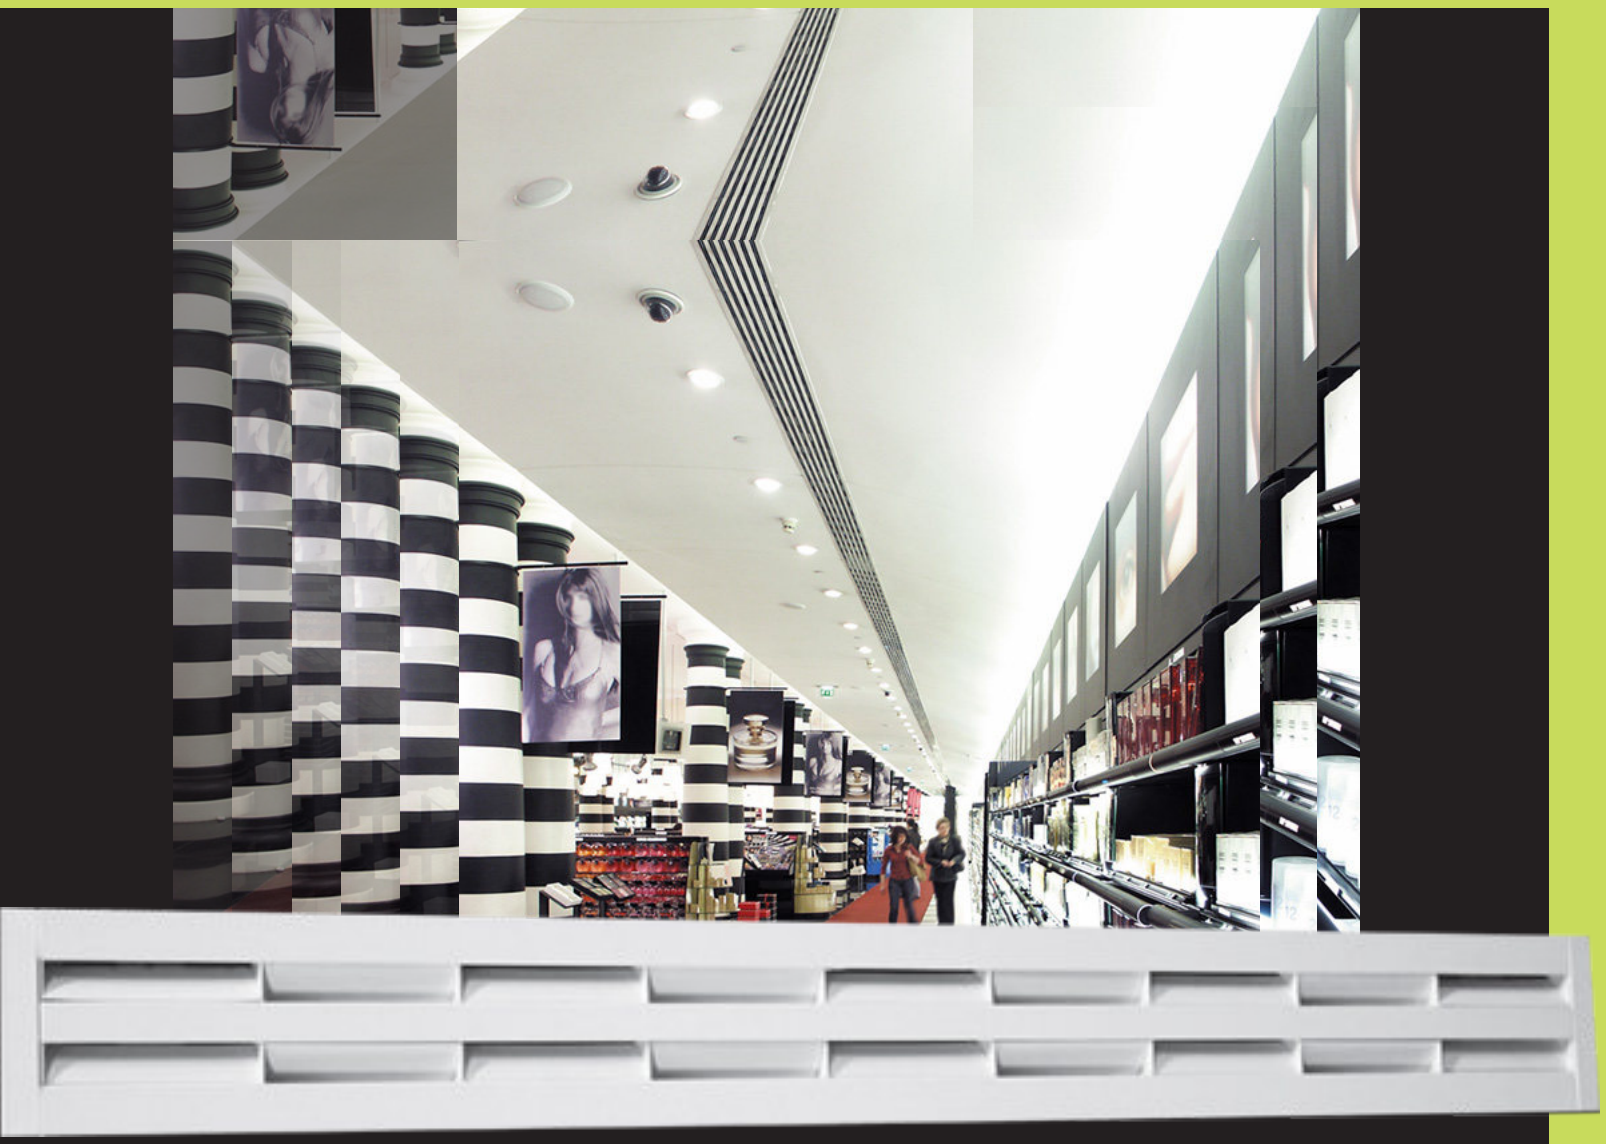

LSD

High Induction Linear Slot Diffuser

EFFECTIV®

Feb 13 2026

LSD SERIES
High Induction Linear Slot Diffuser

LSD

- Each sector can be adjusted independently
- Possibility of 1 way, 2 way, 2 way alternate or vertical air diffusion patterns, or hybrid combinations
- Default 2 way alternate pattern creates high induction and allows 2 way diffusion even from a single slot
- Architecturally appealing lines and finish
- Invisible clip mounting system available with PLSD plenum, great for drywall mounting without apparent screws, very fast and secure
- Can be joined to create long continuous diffusers, 90 degree corners also available
- Diffuser constructed from aluminum with PVC adjustable curved blades
- Available with white or black vanes

The LSD series High Induction Linear Slot Diffusers are designed to combine aesthetics with technical performance.

Available with 1 to 4 slots, LSD is suitable for both supply and return. Its 4" (100mm) long sectors are made of curved blades which can rotate independently to obtain a horizontal distribution of the air in one or two directions, or a vertical projection.

Its full adjustability and high induction ratio are what make LSD so unique. It can easily be adjusted to supply air in custom patterns when required, either to avoid specific people or objects, or to target windows and other sources of heat and cold.

Furthermore, its 2 way alternate pattern, which is the standard configuration, provides an airflow similar to other linear diffusers, yet providing a much higher induction ratio, meaning it mixes more room air with the same quantity of supplied air.

LSD's technology allows for high speed discharge of air with low acoustic noise.

It can be mounted in false ceilings or suspended from the ceiling. Multiple sections can be joined together to form continuous diffusers with active and inactive areas, without breaking the architectural lines. 90 degree angles are available for continuous designs.

LSD diffusers admit a flow variation of 60% while keeping the air stream stable. It can be used from 8.5 feet to 13 feet (2.6 up to 4 meters) high and at a temperature differential up to 22ºF (12ºC).

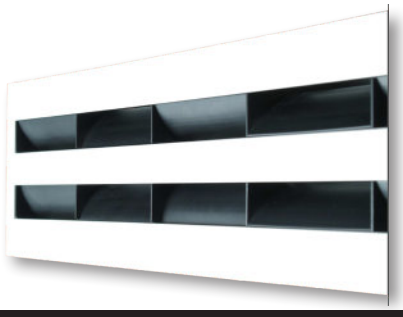

Some Applications

- Fenestrated Walls
- Hallways and Long Spaces
- Commercial Spaces: Restaurants, Bars, Hotels, Lobbies, Stores, Outlets
- Offices and Meeting Rooms
- Schools and Classrooms
- Gymnasiums & Training Facilities
- Libraries
- Theathers
- Clean Rooms
- Server Rooms

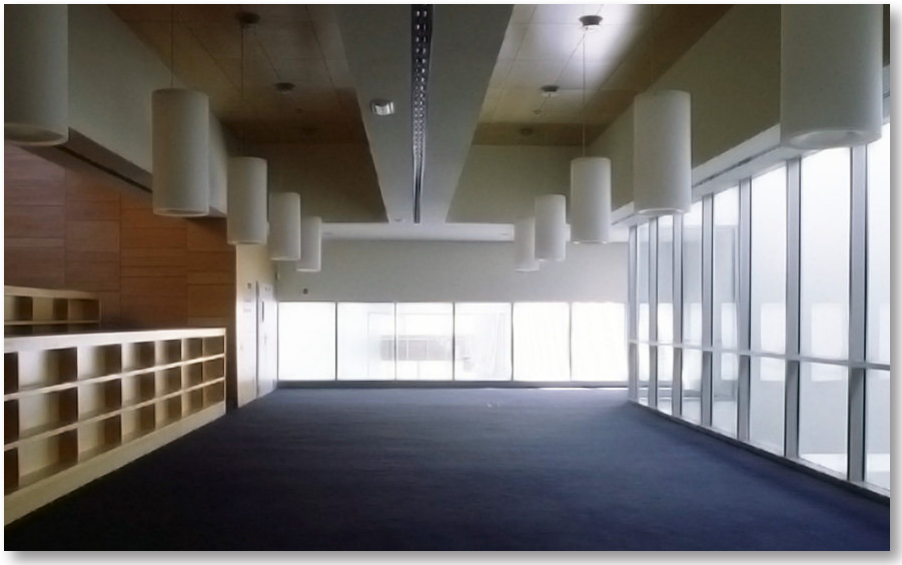

LSD Dimensions

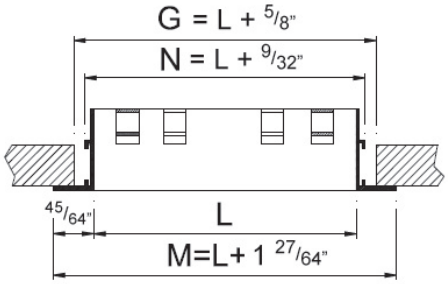

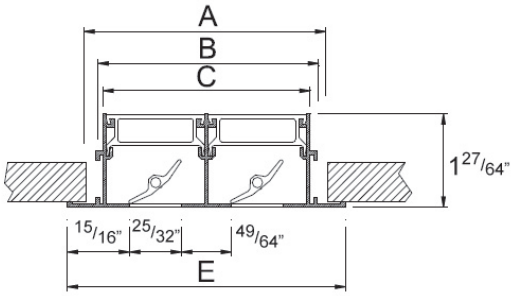

Nb Slots	E	A	B	C
1	2 43/64"	2 11/64"	1 27/32"	1 19/32"
2	4 7/32"	3 47/64"	3 25/64"	3 9/64"
3	5 49/64"	5 9/32"	4 15/16"	4 45/64"
4	7 5/16"	6 13/16"	6 31/64"	6 1/4"

Continuous Linears

LSD can be ordered in sections with or without End Borders to form continuous linear slot diffusers of virtually any length.

The maximum length for one section is 6′ 6″ (2m).

LSD-ARI



LSD-ARD

LSD-INT

Inactive 90º angles for LSD also available

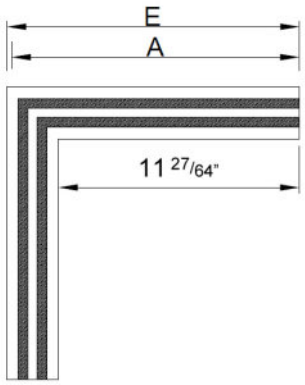

LSD-A90

Airflow Balancing



2 Way Alternate (Default)



2 Way



1 Way

Vertical

Independently adjustable sectored vanes allow for multiple air diffusion patterns. The standard (factory) configuration is 2 Way Alternate and provides optimal performance and comfort in most applications.

PM Mounting Kit

C-clip with long screws for installation without plenum directly into drywall.



PL Hidden Mounting System

PLSD Plenum with PL mounting kit for LSD diffuser allow for quick and secure installation in drywall or open ceilings. LSD diffuser is attached to the plenum by means of spring clips and hooks. The diffuser can be removed and re-installed in just a few seconds for cleaning or balancing purposes.

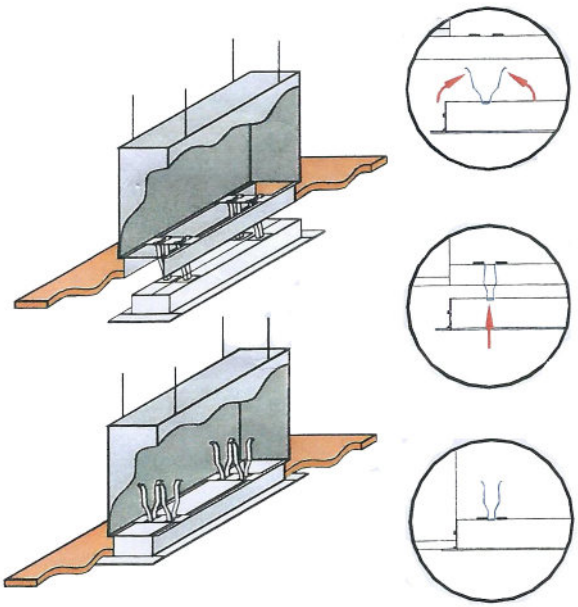

PLSD Plenum With Side Connection

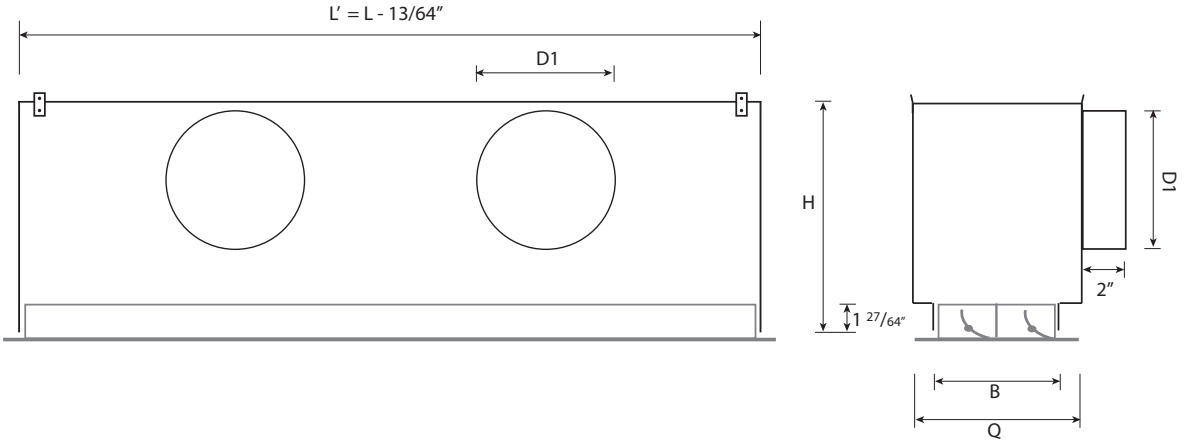

Slots	H	B	N	D1 (L ≤ 20″)	D1 (L ≤ 40″)	D1 (L ≤ 48″)	D1 (L ≤ 60″)	D1 (L ≤ 78″)
1	10 5/64"	1 27/32″	2 23/32″	1x 6″D	1x 6″D	1x 6″D	1x 6″D	2x 6″D
2	10 5/64"	3 25/64″	4 1/4″	1x 6″D	1x 6″D	1x 6″D	2x 6″D	2x 6″D
3	11 21/32"	4 15/16″	5 25/32″	1x 8″D	1x 8″D	2x 8″D	2x 8″D	2x 8″D
4	11 21/32"	6 31/64″	7 21/64″	1x 8″D	1x 8″D	2x 8″D	2x 8″D	2x 8″D

PLSD-T Plenum With Top Connection

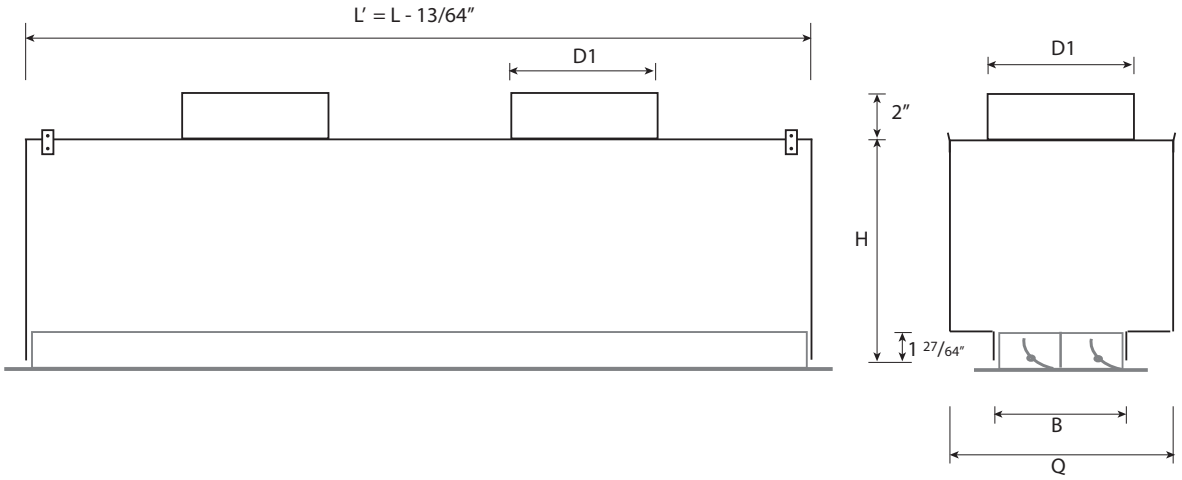

Slots	H	B	N	D1 (L ≤ 20")	D1 (L ≤ 40")	D1 (L ≤ 48")	D1 (L ≤ 60")	D1 (L ≤ 78")
1	8"	1 27/32"	6 7/8"	1x 6"D	1x 6"D	1x 6"D	1x 6"D	2x 6"D
2	8"	3 25/64"	6 7/8"	1x 6"D	1x 6"D	1x 6"D	2x 6"D	2x 6"D
3	10"	4 15/16"	8 7/8"	1x 8"D	1x 8"D	2x 8"D	2x 8"D	2x 8"D
4	10"	6 31/64"	8 7/8"	1x 8"D	1x 8"D	2x 8"D	2x 8"D	2x 8"D

Integrated Air Volume Dampers



R

Perforated damper + air equalizer



MRT

Manually operated damper, cable inside the plenum, adjustment through face



MRT2

Manually operated damper, cable through drywall with termination fixture

EB

Battery operated electro-balance damper with remote control, cable through face

EB2

Battery operated electro-balance damper with remote control, cable through drywall with termination fixture

LSD Performance Data - 2 Way Alternate



1 Slot	CFM / Linear Foot	5	10	15	20	25	30	35	40
	Pressure Loss (in.w.g.)	0.004	0.016	0.036	0.064	0.098	0.141	0.192	0.25
	NC	-	-	17	26	34	40	45	49
	Throw (ft) - Coanda Effect	1-1-2	2-3-4	2-4-6	3-5-8	4-7-10	5-8-12	6-10-14	7-11-16
	Throw (ft) - No Ceiling Effect	1-1-2	1-2-3	2-3-5	2-4-6	3-5-8	4-6-9	4-7-11	5-8-12
2 Slots	CFM / Linear Foot	10	20	30	40	50	60	70	80
	Pressure Loss (in.w.g.)	0.005	0.02	0.045	0.08	0.124	0.179	0.241	0.315
	NC	-	-	15	24	30	36	41	45
	Throw (ft) - Coanda Effect	1-1-2	2-3-4	3-4-7	4-6-9	4-7-11	5-9-13	6-10-16	7-12-18
	Throw (ft) - No Ceiling Effect	1-1-2	1-2-3	2-3-5	3-4-7	3-6-8	4-7-10	5-8-12	5-9-13
3 Slots	CFM / Linear Foot	15	30	45	60	75	90	105	120
	Pressure Loss (in.w.g.)	0.006	0.024	0.054	0.095	0.148	0.212	0.288	0.375
	NC	-	-	17	27	35	41	47	52
	Throw (ft) - Coanda Effect	1-2-2	2-3-5	3-5-7	4-7-10	5-8-12	6-10-15	7-12-17	8-13-20
	Throw (ft) - No Ceiling Effect	1-1-2	1-2-4	2-4-6	3-5-7	4-6-9	4-7-11	5-9-13	6-10-15
4 Slots	CFM / Linear Foot	20	40	60	80	100	120	140	160
	Pressure Loss (in.w.g.)	0.008	0.031	0.068	0.12	0.188	0.269	0.365	0.476
	NC	-	-	16	25	33	38	43	48
	Throw (ft) - Coanda Effect	1-2-3	2-4-6	3-6-9	5-8-12	6-10-14	7-12-17	8-14-20	9-16-23
	Throw (ft) - No Ceiling Effect	1-1-2	2-3-4	3-4-6	3-6-9	4-7-11	5-9-13	6-10-15	7-12-17

- NC value based on 10 db room attenuation
- Horizontal Throw values are based on isothermal air and terminal velocities of **100 fpm, 60 fpm and 40 fpm** respectively

Noise and Pressure Loss Correction Factors Based on Length and Damper Opening													
		L = 20"			L = 40"			L = 48"			L > 60"		
Damper Opening %		100%	50%	0%	100%	50%	0%	100%	50%	0%	100%	50%	0%
1 Slot	Pressure Loss	0.95	2.35	3.15	1	1.4	2.2	1	1.4	2.2	1.1	2.5	3.3
	NC	-6	-3	-3.7	0	+0.8	+0.4	+1	+1.7	+1.2	-2.1	-0.4	-1.9
2 Slots	Pressure Loss	0.98	2.48	3.25	1	1.5	2.3	1	1.5	2.3	1.2	2.7	3.5
	NC	-3.7	-3.4	-2.9	0	+0.6	+0.6	+2.4	+3.3	+3.2	-0.5	+0.8	+0.9
3 Slots	Pressure Loss	0.96	2.26	3.36	1	1.3	2.4	1	1.3	2.4	1.3	2.4	3.5
	NC	-6.9	-6.3	-5.9	0	+0.9	+0.5	-3	-2.9	-3	-1.8	-1.5	-1.6
4 Slots	Pressure Loss	0.95	2.35	3.05	1	1.4	2.1	1	1.4	2.1	1.1	2.5	3.2
	NC	-3.4	-1.6	-2.4	0	+1.6	+1.2	-2	-1.4	-1.5	-2	-1.3	-1.5

Multiply Pressure Loss values, add or substract NC values

Throw Correction Factors Based on Length				
	L = 20"	L = 40"	L = 48"	L > 60"
1 Slot	0.71	1	1.2	1.43
2 Slots	0.73	1	1.27	1.34
3 Slots	0.74	1	1.17	1.22
4 Slots	0.75	1	1.14	1.19

Multiply throw values with correction factor

Delta T Correction Factors		
Δ T (F)	Kh	KI
0	0.05	1
-2	0.056	0.965
-4	0.063	0.925
-6	0.071	0.89
-8	0.079	0.865
-10	0.09	0.835
-12	0.1	0.82
-15	0.12	0.78
-18	0.14	0.75

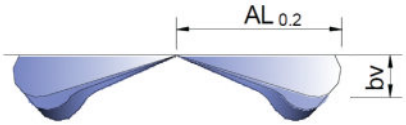

bv= kh x Throw

Throw'(Δ T)= KI x Throw

Kh = Correction Factor for Vertical Diffusion
KI = Throw Correction Factor
$AL_{0.2}$ = Distance at which velocity reaches 40 fpm

Induction Ratio				
Throw (ft)	1 Slot	2 Slots	3 Slots	4 Slots
4	8	7	6	5
6	14	12	9	8
8	18	14	12	10
10	22	18	15	13
15	33	27	24	18
20	44	36	31	26
25	55	46	38	33
30	66	55	46	39

induced room air = supplied cfm * i

induced room air = cfm mixed for given throw

Temperature Difference Ratio				
Throw (ft)	1 Slot	2 Slots	3 Slots	4 Slots
4	0.082	0.115	0.14	0.18
6	0.065	0.088	0.12	0.135
8	0.057	0.079	0.097	0.12
10	0.051	0.07	0.09	0.105
15	0.043	0.058	0.075	0.09
20	0.038	0.05	0.065	0.078
25	0.034	0.046	0.057	0.07
30	0.031	0.043	0.054	0.065

Delta T (Throw) = Delta T (Supply) * Delta T Ratio

Delta T (Supply) = T (Room) - T (Supply)
Delta T (Throw) = T (Room) - T (Throw)



LSD Performance Data - 2 Way



2 Slots	CFM / Linear Foot	10	20	30	40	50	60	70	80
	Pressure Loss (in.w.g.)	0.005	0.02	0.045	0.08	0.124	0.179	0.241	0.315
	NC	-	-	15	24	30	36	41	45
	Throw (ft) - Coanda Effect	1-2-3	3-4-6	4-6-9	5-8-13	6-11-16	8-13-19	9-15-22	10-17-26
	Throw (ft) - No Ceiling Effect	1-2-2	2-3-5	3-5-7	4-6-10	5-8-12	6-10-14	7-11-17	8-13-19
4 Slots	CFM / Linear Foot	20	40	60	80	100	120	140	160
	Pressure Loss (in.w.g.)	0.008	0.031	0.068	0.12	0.188	0.269	0.365	0.476
	NC	-	-	16	25	33	38	43	48
	Throw (ft) - Coanda Effect	2-3-4	3-6-8	5-8-13	7-11-17	8-14-21	10-17-25	12-20-30	14-23-34
	Throw (ft) - No Ceiling Effect	1-2-3	3-4-6	4-6-9	5-8-13	6-11-16	8-13-19	9-15-22	10-17-26

- NC value based on 10 db room attenuation
- Horizontal Throw values are based on isothermal air and terminal velocities of **100 fpm, 60 fpm and 40 fpm** respectively

Noise and Pressure Loss Correction Factors Based on Length and Damper Opening													
		L = 20"			L = 40"			L = 48"			L > 60"		
Damper Opening %		100%	50%	0%	100%	50%	0%	100%	50%	0%	100%	50%	0%
2 Slots	Pressure Loss	0.98	2.48	3.25	1	1.5	2.3	1	1.5	2.3	1.2	2.7	3.5
	NC	-3.9	-3.5	-3	0	+0.6	+0.6	+2.3	+3.2	+3.1	-0.3	+0.9	+1.1
4 Slots	Pressure Loss	0.95	2.35	3.05	1	1.4	2.1	1	1.4	2.1	1.1	2.5	3.2
	NC	-3.6	-1.5	-2.5	0	+1.5	+1.1	-1.5	-1.3	-1.4	-1.8	-1.2	-1.3

Multiply Pressure Loss values, add or substract NC values

Throw Correction Factors Based on Length				
	L = 20"	L = 40"	L = 48"	L > 60"
2 Slots	0.6	1	1.17	1.3
4 Slots	0.767	1	1.2	1.17

Multiply throw values with correction factor

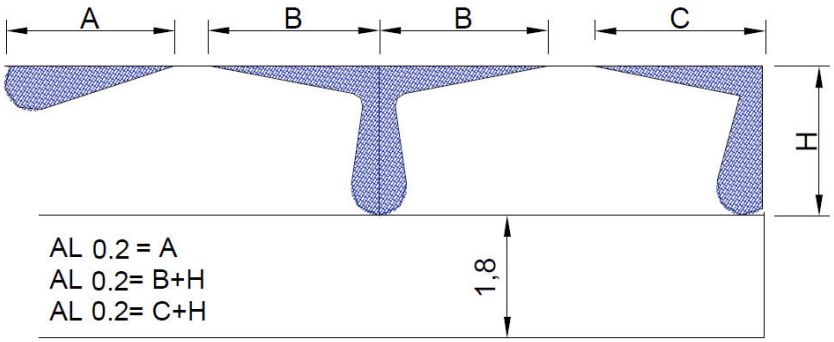

Delta T Correction Factors		
Δ T (F)	Kh	KI
0	0.05	1
-2	0.056	0.95
-4	0.062	0.92
-6	0.069	0.88
-8	0.077	0.85
-10	0.087	0.82
-12	0.096	0.8
-15	0.12	0.77
-18	0.135	0.73

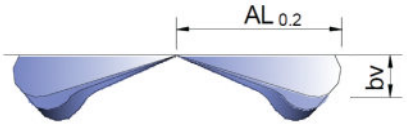

bv= kh x Throw

Throw'(Δ T)= KI x Throw

Kh = Correction Factor for Vertical Diffusion
KI = Throw Correction Factor
$AL_{0.2}$ = Distance at which velocity reaches 40 fpm

Induction Ratio		
Throw (ft)	2 Slots	4 Slots
4	3	4
6	7	6
8	9	7
10	11	9
15	16	13
20	21	17
25	27	21
30	31	26

induced room air = supplied cfm * i

induced room air = cfm mixed for given throw

Temperature Difference Ratio		
Throw (ft)	2 Slots	4 Slots
4	0.26	0.35
6	0.19	0.28
8	0.17	0.24
10	0.15	0.22
15	0.125	0.175
20	0.105	0.145
25	0.093	0.135
30	0.085	0.125

Delta T (Throw) = Delta T (Supply) * Delta T Ratio

Delta T (Supply) = T (Room) - T (Supply)
Delta T (Throw) = T (Room) - T (Throw)



LSD Performance Data - 1 Way



1 Slot	CFM / Linear Foot	5	10	15	20	25	30	35	40
	Pressure Loss (in.w.g.)	0.004	0.016	0.036	0.064	0.098	0.141	0.192	0.25
	NC	-	-	17	26	34	40	45	49
	Throw (ft) - Coanda Effect	2-3-4	3-5-8	5-8-12	7-11-17	8-14-21	10-17-25	12-19-29	13-22-33
	Throw (ft) - No Ceiling Effect	1-2-3	2-4-6	4-6-9	5-8-12	6-10-15	7-12-19	9-15-22	10-17-25
2 Slots	CFM / Linear Foot	10	20	30	40	50	60	70	80
	Pressure Loss (in.w.g.)	0.005	0.02	0.045	0.08	0.124	0.179	0.241	0.315
	NC	-	-	15	24	31	37	41	45
	Throw (ft) - Coanda Effect	2-3-4	4-6-9	5-9-14	7-12-18	9-15-23	11-18-28	13-22-32	15-25-37
	Throw (ft) - No Ceiling Effect	1-2-3	3-5-7	4-7-10	5-9-14	7-11-17	8-14-21	10-16-24	11-19-28
3 Slots	CFM / Linear Foot	15	30	45	60	75	90	105	120
	Pressure Loss (in.w.g.)	0.006	0.024	0.054	0.095	0.148	0.212	0.288	0.375
	NC	-	-	17	27	35	41	47	52
	Throw (ft) - Coanda Effect	2-3-5	4-7-10	6-10-16	8-14-21	10-18-26	13-21-32	15-25-37	17-28-42
	Throw (ft) - No Ceiling Effect	2-3-4	3-5-8	5-8-12	6-10-16	8-13-20	10-16-24	11-19-28	13-21-32
4 Slots	CFM / Linear Foot	20	40	60	80	100	120	140	160
	Pressure Loss (in.w.g.)	0.008	0.031	0.068	0.12	0.188	0.269	0.365	0.476
	NC	-	-	17	26	33	39	44	48
	Throw (ft) - Coanda Effect	2-4-6	5-8-11	7-12-17	9-16-23	12-19-29	14-23-35	16-27-41	19-31-47
	Throw (ft) - No Ceiling Effect	2-3-4	3-6-9	5-9-13	7-12-17	9-15-22	11-18-26	12-21-31	14-24-35

- NC value based on 10 db room attenuation
- Horizontal Throw values are based on isothermal air and terminal velocities of **100 fpm, 60 fpm and 40 fpm** respectively

Noise and Pressure Loss Correction Factors Based on Length and Damper Opening													
		L = 20”			L = 40”			L = 48”			L > 60”		
Damper Opening %		100%	50%	0%	100%	50%	0%	100%	50%	0%	100%	50%	0%
1 Slot	Pressure Loss	0.95	2.35	3.15	1	1.4	2.2	1	1.4	2.2	1.1	2.5	3.3
	NC	-6	-3	-3.6	0	+0.8	+0.4	+1.2	+1.9	+1.4	-2	0	-1.6
2 Slots	Pressure Loss	0.98	2.48	3.25	1	1.5	2.3	1	1.5	2.3	1.2	2.7	3.5
	NC	-4	-3.6	-3.1	0	+0.6	+0.6	+2.3	+3.2	+3.1	0	+1	+1.2
3 Slots	Pressure Loss	0.96	2.26	3.36	1	1.3	2.4	1	1.3	2.4	1.3	2.4	3.5
	NC	-7	-6	-6	0	+0.9	+0.5	-2.7	-2.6	-2.7	-1.4	-1.1	-1.1
4 Slots	Pressure Loss	0.95	2.35	3.05	1	1.4	2.1	1	1.4	2.1	1.1	2.5	3.2
	NC	-3.4	-1.4	-2.5	0	+1.5	+1.2	-1.8	-1.1	-1.2	-1.7	-1	-1.1

Multiply Pressure Loss values, add or substract NC values

Throw Correction Factors Based on Length				
	L = 20”	L = 40”	L = 48”	L > 60”
1 Slot	0.71	1	1.07	1.14
2 Slots	0.73	1	1.09	1.15
3 Slots	0.74	1	1.11	1.2
4 Slots	0.75	1	1.25	1.25

Multiply throw values with correction factor

Delta T Correction Factors		
Δ T (F)	Kh	KI
0	0.05	1
-2	0.056	0.96
-4	0.063	0.925
-6	0.071	0.89
-8	0.079	0.865
-10	0.09	0.83
-12	0.1	0.82
-15	0.12	0.78
-18	0.14	0.75

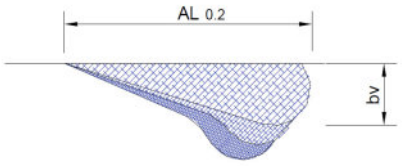

bv= kh x Throw

Throw'(Δ T)= KI x Throw

Kh = Correction Factor for Vertical Diffusion
KI = Throw Correction Factor
$AL_{0.2}$ = Distance at which velocity reaches 40 fpm

Induction Ratio				
Throw (ft)	1 Slot	2 Slots	3 Slots	4 Slots
4	5	3	5	2
6	8	7	6	3
8	10	8	7	6
10	12	10	9	7
15	17	14	12	10
20	21	18	15	13
25	25	22	19	15
30	30	27	23	18

induced room air = supplied cfm * i

induced room air = cfm mixed for given throw

Temperature Difference Ratio				
Throw (ft)	1 Slot	2 Slots	3 Slots	4 Slots
4	0.18	0.26	0.32	0.37
6	0.145	0.19	0.25	0.28
8	0.125	0.17	0.22	0.24
10	0.115	0.15	0.19	0.22
15	0.09	0.125	0.155	0.175
20	0.078	0.105	0.14	0.145
25	0.069	0.094	0.125	0.135
30	0.062	0.085	0.11	0.125

Delta T (Throw) = Delta T (Supply) * Delta T Ratio

Delta T (Supply) = T (Room) - T (Supply)
Delta T (Throw) = T (Room) - T (Throw)



LSD Performance Data - Vertical



1 Slot	CFM / Linear Foot	5	10	15	20	25	30	35	40
	Pressure Loss (in.w.g.)	0.004	0.016	0.036	0.064	0.098	0.141	0.192	0.25
	NC	-	-	17	26	34	40	45	49
	Throw (ft) - Coanda Effect	1-2-2	2-3-5	3-5-7	4-6-10	5-8-12	6-10-14	7-11-17	8-13-19
	Throw (ft) - No Ceiling Effect	1-1-2	1-2-4	2-4-5	3-5-7	4-6-9	4-7-11	5-8-13	6-10-15
2 Slots	CFM / Linear Foot	10	20	30	40	50	60	70	80
	Pressure Loss (in.w.g.)	0.005	0.02	0.045	0.08	0.124	0.179	0.241	0.315
	NC	-	-	15	24	31	37	41	45
	Throw (ft) - Coanda Effect	1-2-3	2-4-5	3-5-8	4-7-11	5-9-13	6-11-16	8-13-19	9-14-22
	Throw (ft) - No Ceiling Effect	1-1-2	2-3-4	2-4-6	3-5-8	4-7-10	5-8-12	6-9-14	6-11-16
3 Slots	CFM / Linear Foot	15	30	45	60	75	90	105	120
	Pressure Loss (in.w.g.)	0.006	0.024	0.054	0.095	0.148	0.212	0.288	0.375
	NC	-	-	17	27	35	41	47	52
	Throw (ft) - Coanda Effect	1-2-3	2-4-6	4-6-9	5-8-12	6-10-15	7-12-18	8-14-21	10-16-24
	Throw (ft) - No Ceiling Effect	1-1-2	2-3-4	3-4-7	4-6-9	4-7-11	5-9-13	6-10-16	7-12-18
4 Slots	CFM / Linear Foot	20	40	60	80	100	120	140	160
	Pressure Loss (in.w.g.)	0.008	0.031	0.068	0.12	0.188	0.269	0.365	0.476
	NC	-	-	17	26	33	39	44	48
	Throw (ft) - Coanda Effect	1-2-3	3-5-7	4-7-11	6-9-14	7-12-18	9-14-21	10-17-25	11-19-29
	Throw (ft) - No Ceiling Effect	1-2-3	2-4-5	3-5-8	4-7-11	5-9-13	6-11-16	8-13-19	9-14-22

- NC value based on 10 db room attenuation
- Horizontal Throw values are based on isothermal air and terminal velocities of **100 fpm, 60 fpm and 40 fpm** respectively

Noise and Pressure Loss Correction Factors Based on Length and Damper Opening													
		L = 20”			L = 40”			L = 48”			L > 60”		
Damper Opening %		100%	50%	0%	100%	50%	0%	100%	50%	0%	100%	50%	0%
1 Slot	Pressure Loss	0.95	2.35	3.15	1	1.4	2.2	1	1.4	2.2	1.1	2.5	3.3
	NC	-6.1	-3.1	-3.6	0	+0.8	+0.4	+0.9	+1.6	+1.1	-2.1	-0.5	-1.9
2 Slots	Pressure Loss	0.98	2.48	3.25	1	1.5	2.3	1	1.5	2.3	1.2	2.7	3.5
	NC	-3.8	-3.4	-2.9	0	+0.6	+0.6	+2.4	+3.3	+3.2	-0.3	+0.9	+1.1
3 Slots	Pressure Loss	0.96	2.26	3.36	1	1.3	2.4	1	1.3	2.4	1.3	2.4	3.5
	NC	-7	-6.3	-6	0	+0.9	+0.5	-2.8	-2.8	-2.9	-1.5	-1.2	-1.3
4 Slots	Pressure Loss	0.95	2.35	3.05	1	1.4	2.1	1	1.4	2.1	1.1	2.5	3.2
	NC	-3.4	-1.5	-2.5	0	+1.6	+1.2	-1.9	-1.3	-1.4	-1.9	-1.2	-1.3

Multiply Pressure Loss values, add or substract NC values

Throw Correction Factors Based on Length				
	L = 20”	L = 40”	L = 48”	L > 60”
1 Slot	0.7	1	1.1	1.2
2 Slots	0.72	1	1.15	1.25
3 Slots	0.72	1	1.12	1.2
4 Slots	0.74	1	1.25	1.25

Multiply throw values with correction factor

Delta T Correction Factor				
Δ T (F)	**Kl 1 Slot**	**Kl 2 Slots**	**Kl 3 Slots**	**Kl 4 Slots**
0	1	1	1	1
+9	0.75	0.76	0.77	0.8
+18	0.64	0.65	0.66	0.64

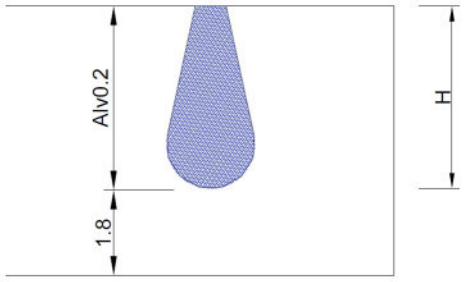

Throw'(Δ T)= Kl x Throw

Kl = Correction Factor for Vertical Diffusion
$AL_{0.2}$ = Distance at which velocity reaches 40 fpm

LSD Performance Data - Return Air

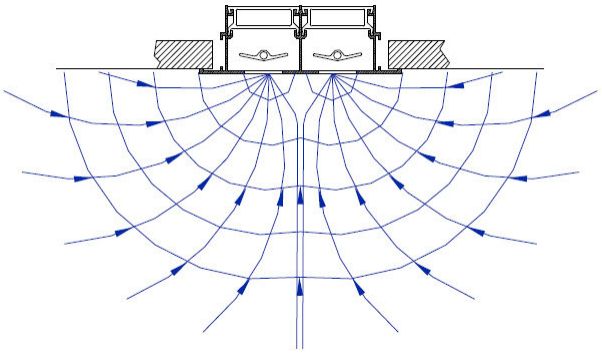

1 Slot	CFM / Linear Foot	10	15	20	25	30	35	40
	Pressure Loss (in.w.g.)	0.02	0.048	0.072	0.12	0.177	0.221	0.301
	NC	-	22	28	38	> 40	> 40	> 40
2 Slots	CFM / Linear Foot	20	30	40	50	60	70	80
	Pressure Loss (in.w.g.)	0.028	0.052	0.1	0.157	0.229	0.301	0.402
	NC	-	20	32	39	> 40	> 40	> 40
3 Slots	CFM / Linear Foot	20	30	40	50	60	70	80
	Pressure Loss (in.w.g.)	0.012	0.032	0.06	0.088	0.129	0.185	0.241
	NC	-	-	19	26	33	39	> 40
4 Slots	CFM / Linear Foot	30	45	60	75	90	105	120
	Pressure Loss (in.w.g.)	0.028	0.056	0.096	0.137	0.209	0.281	0.402
	NC	-	16	24	32	38	> 40	> 40

NC value based on 10 db room attenuation

Noise and Pressure Loss Correction Factors Based on Length and Damper Opening													
		L = 20”			L = 40”			L = 48”			L > 60”		
Damper Opening %		**100%**	**50%**	**0%**	**100%**	**50%**	**0%**	**100%**	**50%**	**0%**	**100%**	**50%**	**0%**
1 Slot	**Pressure Loss**	0.88	2.28	3	1	1.4	2.2	1.3	2.7	3.5	1.5	2.9	3.7
	NC	0	3	5	0	4	7	0	3	5	0	3	7
2 Slots	**Pressure Loss**	0.85	2.35	3.15	1	1.5	2.3	1.4	2.9	3.7	1.66	3.16	3.96
	NC	0	3	5	0	4	7	0	4	7	0	3	8
3 Slots	**Pressure Loss**	0.8	2.1	3.2	1	1.3	2.4	1.2	2.5	3.6	1.4	2.7	3.8
	NC	0	4	5	0	5	8	0	5	8	0	4	8
4 Slots	**Pressure Loss**	0.7	2.1	2.8	1	1.4	2.1	1.3	2.7	3.4	1.5	2.9	3.6
	NC	0	4	5	0	4	8	0	5	8	0	4	8

Multiply Pressure Loss values, add or substract NC values

How to Specify LSD

Supply and mounting of High Induction Linear Slot Diffuser with 4" long adjustable curved blades model LSD. Constructed from extruded aluminum with PVC blades, powder coated in white M9016. Shall be supplied in 2 Way Alternate airflow pattern standard configuration for higher induction rate. Shall be supplied and installed with PLSD high performance plenum box featuring PL attachment system for easy and secure installation. By EffectiV.

How to Order LSD Series

LSD	-AR	-PL	-AB	2	48	/M9016	+ PLSD	-AL	-R	-EQ		
											EQ	Air Equalizing Grid
									Damper		**R**	Perforated Damper + Air Equalizer
											MRT	Manual Cable Thru Face
											MRT2	Manual Cable Thru Drywall
											EB	Remote Controled, Thru Face
											EB2	Remote Controled, Thru Drywall
								Insulation			**AL**	1/2" Acoustical Liner
											R6	2" R6 Thermal Insulation
							Plenum				**PLSD**	PLSD Plenum, Side Connection
											PLSD-T	PLSD Plenum, Top Connection
						Finish					**/M9016**	Powder Coated White RAL9016
											/AA	Anodized in Matt Silver, Black Vanes
											/RAL	Other RAL: please specify
					Length						**48**	Lenght in inches, Max 78"
				Number of Slots							**1**	1 Slot
											2	2 Slots
											3	3 Slots
											4	4 Slots
			Sectored Vanes Color								**AB**	White Sectored Vanes
											AN	Black Sectored Vanes
		Mounting System									**PL**	Concealed Spring Clips (req. PLSD)
											PM	Concealed U Clip and Long Screws
											T	Visible Screws
	End Borders										**AR**	Two End Borders
											ARI	Left End Border Only
											ARD	Right End Border Only
											INT	Interior (No End Borders)