

### AX6-ACTIF Series Thermodynamic Aluminum Round Swirl Diffuser

**Material** | Powder coated heavy gauge spun aluminum with steel blades.



**Air Pattern** | 360° diffusion with horitonztl swirl to downward flow adjustment, autonomously adjusted by means of a thermodynamic piston.

**Ceiling Types** | Open and Closed.



**AX6-ACTIF**  
by MADEL®

**ACTIF**

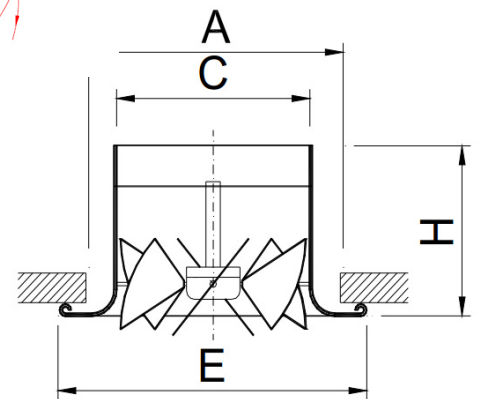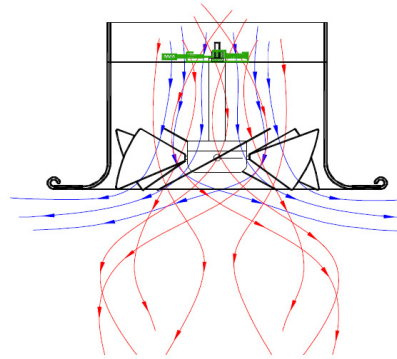


Select Model						
✓	Model	Duct	A	C	E	H
	<b>AX6-ACTIF 250</b>	250	300	248	360	202
	<b>AX6-ACTIF 315</b>	315	400	313	464	225
	<b>AX6-ACTIF 400</b>	400	500	401	560	250
	<b>AX6-ACTIF 500</b>	500	620	497	690	306
	<b>AX6-ACTIF 630</b>	630	780	627	870	350

All dimensions in millimeters (mm)

Optional CH6 Security Grille					
✓	Model	Dext	Dint	A	H
	<b>CH6 250</b>	350	300	40	14
	<b>CH6 315</b>	450	400	40	14
	<b>CH6 400</b>	550	500	50	17
	<b>CH6 500</b>	655	600	80	17
	<b>CH6 630</b>	860	790	90	20

All dimensions in millimeters (mm)

#### CH6 Security Grille

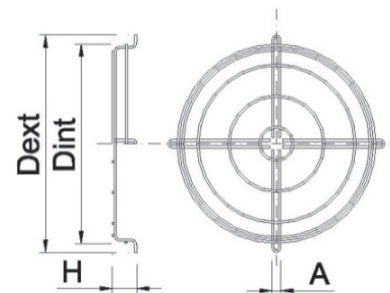

Select Finish	
	Powder Coated White (RAL 9016)
	Mill Finish
	Other RAL (specify) :

<b>Project:</b>
<b>Engineer:</b>
<b>Architect:</b>
<b>Contractor:</b>