


PERFAIR-ST Series High Performance Plenum for Square Diffusers Top Connection


Material | heavy gauge galvanized steel

Matching Faces | AXO-S, AXO-S300, AXO-S400, AXO-SX, AXO-SY, NEX-S, OTO-S, PLAY-S, RXO-S

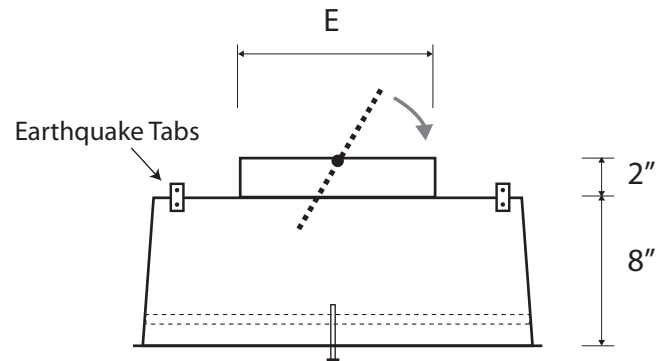


Select Model				
✓	Model	Duct Size	B	E
	PERFAIR-ST 1206	6	11 1/2	5 7/8
	PERFAIR-ST 1208	8	11 1/2	7 7/8
	PERFAIR-ST 2406	6	23 1/2	5 7/8
	PERFAIR-ST 2408	8	23 1/2	7 7/8
	PERFAIR-ST 2410	10	23 1/2	9 7/8
	PERFAIR-ST 2412	12	23 1/2	11 7/8

All dimensions in inches

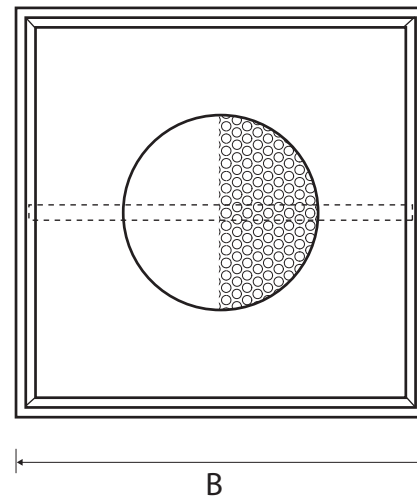


Integrated Air Volume Dampers




R

Perforated damper +
air equalizer



MRT

Manually operated damper,
cable inside the plenum,
adjustment through face




MRT2

Manually operated damper,
cable through drywall with
termination fixture



EB

Battery operated
electro-balance damper
with remote control,
cable through face

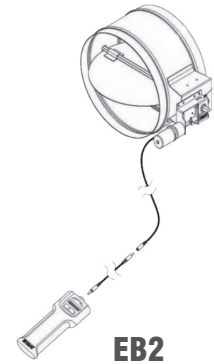

EB2

Battery operated
electro-balance damper
with remote control,
cable through drywall
with termination fixture

Insulation	
AL	1/2" Interior Accoustical Liner
AL1	1" Interior Accoustical Liner
R6	2" Exterior R6 Thermal Insulation
Neck-Installed Air Volume Damper	
R	Perforated air volume damper/equalizer
MRT	Manually operated, cable thru face
MRT2	Manually operated, termination fixture
EB	Electro-balanced, battery powered, cable thru face
EB2	Electro-balanced, battery powered, termination fixture
Cable Length (MRT2 or EB2)	

Project:
Engineer:
Architect:
Contractor: