AXP-MOD Series

Fixed Blades Round Swirl Diffusers in Lay-in Panel




AXP-MOD

Material | Powder coated heavy gauge spun aluminum

Air Pattern | fixed 360° swirl diffusion

Ceiling Types | False Ceiling

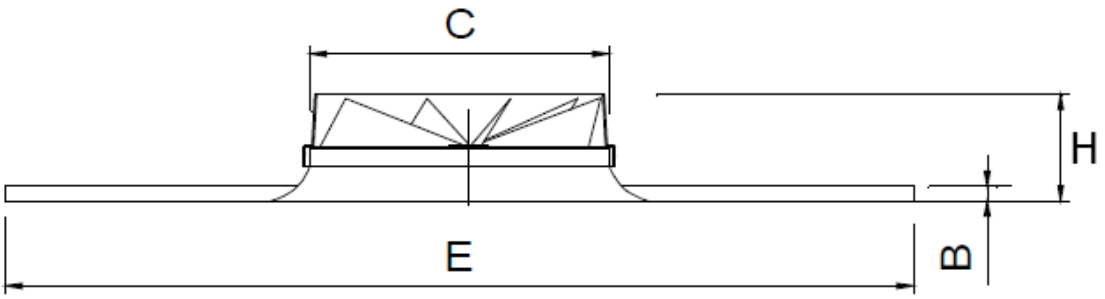

Select Model						
✓	**Model**	**Duct**	**B**	**C**	**E**	**H**
	AXP-MOD 05	5	15/32	4 25/32	23 3/4	3 11/32
	AXP-MOD 06	6	15/32	5 7/8	23 3/4	4 27/32
	AXP-MOD 08	8	15/32	7 51/64	23 3/4	3 11/32
	AXP-MOD 10	10	15/32	9 49/64	23 3/4	3 11/32
	AXP-MOD 12	12	15/32	11 7/8	23 3/4	4 27/32


All dimensions in inches (in)
Note: AXP-MOD 06 and AXP-MOD 12 have Metric to Imperial transitions installed in the collar. Transitions are made of unpainted stainless steel.

Select Finish	
	Powder Coated White (RAL 9016)
	Mill Finish
	Other RAL (specify) :

Optional Conical Plenum

Select Model					
✓	Model	Duct	D1	D2	H
	PLRR 0504	4	3 7/8	5	6
	PLRR 0505	5	4 7/8	5	6
	PLRR 0605	5	4 7/8	6 3/8	6
	PLRR 0606	6	5 7/8	6 3/8	6
	PLRR 0805	5	4 7/8	8	8
	PLRR 0806	6	5 7/8	8	8
	PLRR 0808	8	7 7/8	8	8
	PLRR 1006	6	5 7/8	10	8
	PLRR 1008	8	7 7/8	10	8
	PLRR 1010	10	9 7/8	10	8
	PLRR 1208	8	7 7/8	12 3/8	10
	PLRR 1210	10	9 7/8	12 3/8	10
	PLRR 1212	10	9 7/8	12 3/8	10


All dimensions in inches (in)

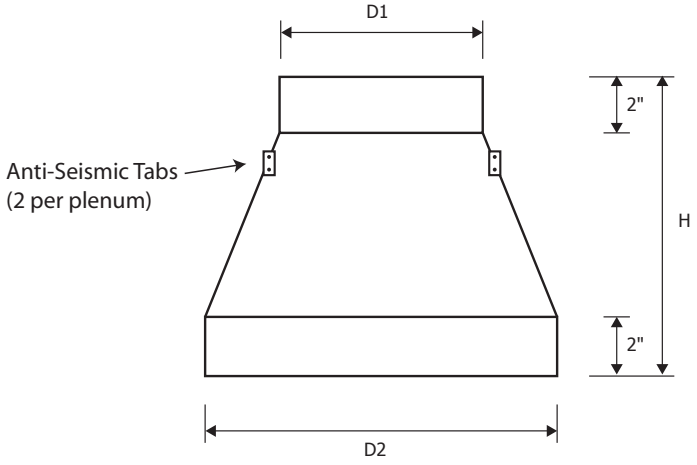

Optional Rectangular Plenum with Side Connection


Select Model					
✓	Model	D2	F	Z	D1
	PLXP 05	5	8	6	3 7/8″
	PLXP 06	6 19/64″	10	7	4 7/8″
	PLXP 08	8	12	10	5 7/8″
	PLXP 10	10	15	11	7 7/8″
	PLXP 12	12 13/32″	19	14	9 7/8″

All dimensions in inches (in)

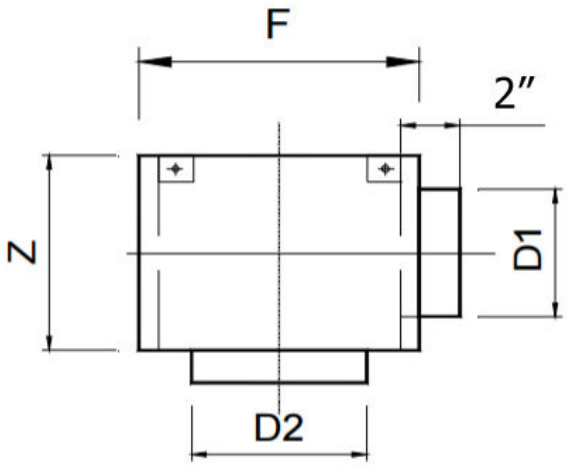


Options		
	S	Top connection
	R	Perforated air volume damper/equalizer
	AL	1/2″ Interior Acoustical Liner
	AL1	1″ Interior Acoustical Liner
	ALC	1/2″ Closed Cell Acoustical Insulation
	R6	2″ Exterior R6 Thermal Insulation

Air Volume Dampers




R

Perforated damper + air equalizer



MRT

Manually operated damper, cable inside the plenum, adjustment through face



MRT2

Manually operated damper, cable through drywall with termination fixture



EB

Battery operated electro-balance damper with remote control, cable through face



EB2

Battery operated electro-balance damper with remote control, cable through drywall with termination fixture

Options		
	EQ	Air Equalizing Grid (Perforated Plate)
	WT	Transition Powder Coated White (6" and 12" only)

Neck-Installed Air Volume Damper		
	R	Perforated air volume damper/equalizer
	MRT	Manually operated, cable thru face
	MRT2	Manually operated, termination fixture
	EB	Electro-balanced, battery powered, cable thru face
	EB2	Electro-balanced, battery powered, termination fixture

Cable Length (MRT2 or EB2)	

Project:

Engineer:

Architect:

Contractor: